

MIN/MAX DIMENSIONS (with SM-PROJ-M-BLK)

	without 6mm spacers	with 6mm spacers
SM-ADJPOLE-S		
MINIMUM	14 7/8"	15 1/16"
MAXIMUM	17 7/8"	18 1/16"
SM-ADJPOLE-M		
MINIMUM	18 7/8"	19 1/16"
MAXIMUM	25 7/8"	26 1/16"



Lifetime Limited Warranty

Strong™ Mounts have a Lifetime Limited Warranty. This warranty includes parts and labor repairs on all components found to be defective in material or workmanship under normal conditions of use. This warranty shall not apply to products which have been abused, modified or disassembled. Products to be repaired under this warranty must be returned to SnapAV or a designated service center with prior notification and an assigned return authorization number (RA).

For Technical Support call 1.866.838.5052



engineered by
Snap
av

10405 Granite Street Charlotte, NC 28273 | 1.866.424.4489

SM-ADJPOLE-S/M



engineered by
Snap
av

INSTRUCTION MANUAL

ASSEMBLY INSTRUCTIONS


BOX CONTENTS

- Outer Pole
- Inner Pole
- E-Clip

WARNINGS

1. Make sure these instructions are read and thoroughly understood before attempting installation. If you are unsure of any part of the installation process, contact a professional installer for assistance.
2. The ceiling or mounting surface must be capable of supporting the combined weight of the mount and the projector; otherwise the structure must be reinforced.
3. Safety gear and proper tools must be used. Failure to do so can result in property damage and/or serious injury.
4. Follow all instructions and recommendations regarding adequate ventilation and suitable locations for mounting your projector. Consult the owner's manual of your projector for more information.

PACKAGE CONTENTS

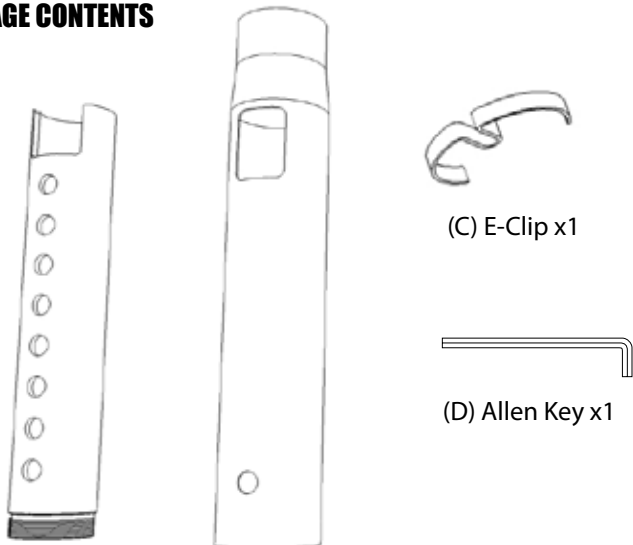

(A) Inner Pole x1 (B) Outer Pole x1

INSTALLATION

Step 1

Following the instructions for the SM-PROJ-M-BLK, attach the projector mount Ceiling Plate (N) to the ceiling and Mount Base (M) with Mount Arms (O) to projector.

Step 2

Slide Inner Pole (A) into Outer Pole (B) and set the length by aligning one hole on the Inner Pole with the single hole on Outer Pole. When length of desired extension is achieved, install E-Clip (C) around Outer Pole so that the center stud inserts into both holes. (See back page for minimum and maximum dimensions).

NOTE: The E-clip (C) provided is for quick assembly and quick adjustments. The set screws located on the extension poles are used in final locking of the extension pole and projector mount.

Step 3

Thread assembled extension pole to ceiling plate (N). Rotate the extension poles to desired location and orientation. Snug up set-screws at top, middle and at the mount body. **(Do not fully tighten until projector is mounted and at the correct position)**

Thread Mount Body (P) to bottom of assembled pole to desired position. Do not fully tighten set screws at this time.

Step 4

Hang the projector following STEP 5 in the SM-PROJ-M-BLK Manual.

If adjustment is needed, it is recommended the projector is removed to avoid dropping/damaging mount or any persons. Firmly hold Inner Pole, remove E-Clip and adjust Inner Pole up or down as needed. Re-align holes and re-install E-clip.

Step 5

Fully tighten all set screws to lock everything in place with Allen Key (D).

Installation is complete.

