

SL ELEVATE

The SL Elevate has been designed as an optional floor standing or wall hanging monitor making it a perfect choice for the most demanding 2 channel Hi-fi and home cinema applications

Operating Range: 55 Hz (-3 dB) to 40 kHz

Sensitivity: 92 dB

Maximum Power Handling: 60 Watt

Impedance: 4 ohms

Average Peak SPL: 111 dB

Weight: 6 kg

Dimensions (with base plate): H: 1285 W: 270 D: 300 mm

Dimensions (without base plate): H: 1261 W: 100 D: 55 mm


Cabinet: Black, White, RAL, NCS

Screen: Black, White, RAL, NCS, Artcoustic Art Gallery



SCHEMATICS

dimensions are in mm

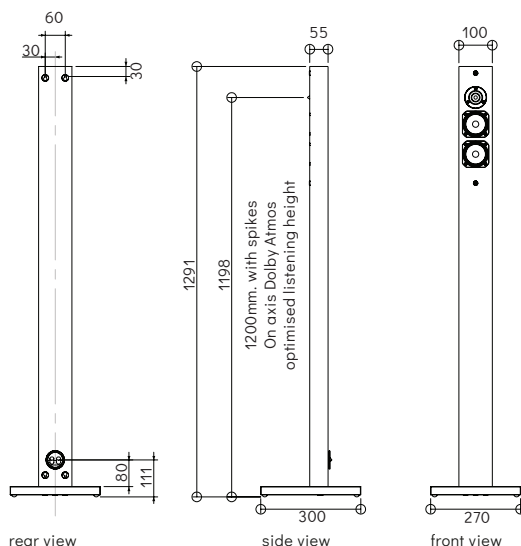

POLAR RESPONSE

horizontal polar response 1m

16000Hz - - - - -
6500Hz - - - - -
2500Hz - - - - -
1000Hz - - - - -

vertical polar response 1m

3D polar response 1m

