

## SL ARCHITECT 4-2


The SL Architect 4-2 is more powerful than the 2-1 and offer options of either single source high output, high performance speaker, for more demanding applications.

Operating Range: 80 Hz (-3 dB) to 40 kHz  
 Sensitivity: 96 dB  
 Maximum Power Handling 2 hours of 6 dB crest factor pink noise,  
 120 Watt RMS (AES Standard)  
 Impedance: 4 ohms nominal  
 Average Peak SPL: 115 dB  
 Weight: 3.4 kg  
 Dimensions: H: 300 W: 300 D: 74 mm  
 Cabinet: Black, White, RAL, NCS  
 Screen: Black, White, RAL, NCS



## SCHEMATICS

dimensions are in mm

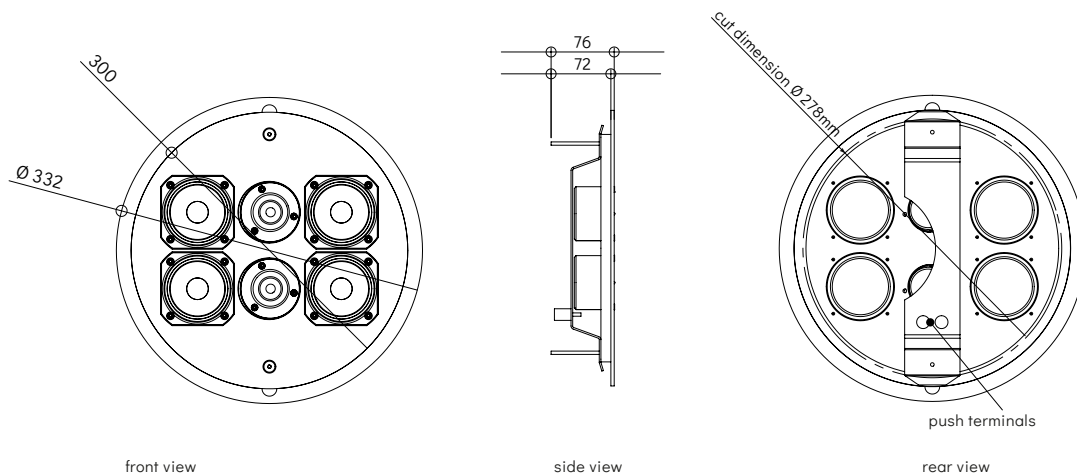

## POLAR RESPONSE

horizontal polar response 2m

16000Hz - - - - -  
 6500Hz - - - - -  
 2500Hz - - - - -  
 1000Hz - - - - -

vertical polar response 2m

3D polar response 2m

