

# 3G ULTRA Daisy-Chain Receiver

VBS-HDIP-509POE

Just Add  
**Power**

## All Audio Capable With Network and POE Passthrough Receiver



The Just Add Power 3G Ultra 509POE Receiver distributes 4K video and supports all lossless audio formats over a single Catx cable.

The 509POE receives and processes a 4K or lower-resolution source from a Just Add Power Transmitter and distributes video to the designated display; features a network out port and DHCP integration; supports multiple receivers on single LAN port - along with all the 4K Receiver system wide features from the 3G Ultra product line.

### Features


<b>DHCP Integration</b>	Provide internet connectivity to a smart device through the same CATx cable that connects the Just Add Power matrix to that device using a DHCP server integrated Receiver	<b>Image Pull</b>	Preview an image from any source or display in any web browser or control system - up to 10 fps
<b>Image Pop</b>	Display a custom logo or message as an overlay on any active screen	<b>Integrated Endpoint Control</b>	Control endpoints with RS232, IR and CEC
<b>Image Push</b>	Load a custom default image or logo for when no source is displayed onscreen	<b>Video Rotation</b>	Rotate your video by 90° for portrait or landscape display
		<b>Video Wall</b>	Can use with 709P2P Transmitter for video wall function

# 3G ULTRA Daisy-Chain Receiver

VBS-HDIP-509POE


Just Add  
**Power**

## Front of Device:

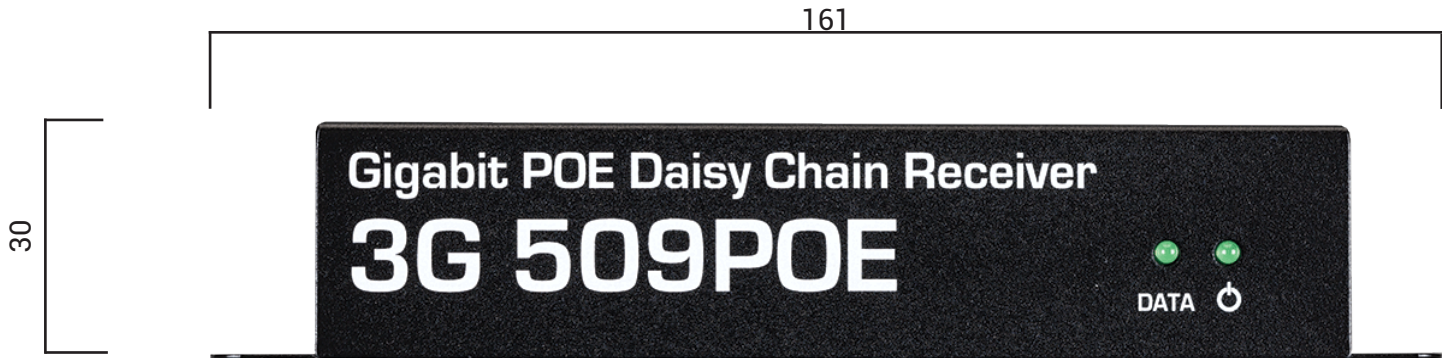

All measurements in millimeters (mm)

## Back of Device:

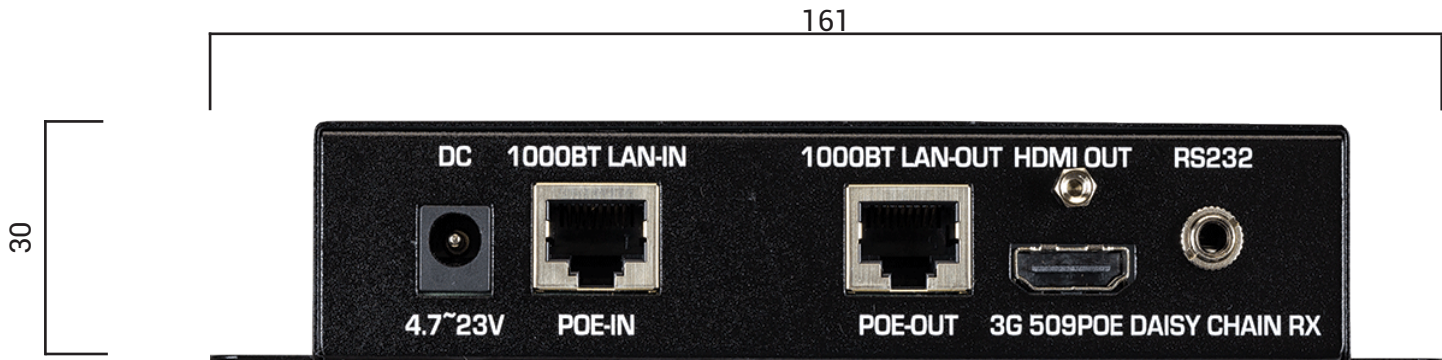

All measurements in millimeters (mm)

## Specifications

<b>Bandwidth</b>	180-500 Mbps	<b>POE</b>	10 watts maximum
<b>Compliance</b>	HDCP 2.2 RoHS/FCC/CE	<b>POE Out</b>	30 watts maximum
<b>Dimensions &amp; Weight</b>	161 x 30 x 123 mm 6.3" x 1.2" x 4.8" in 0.36 kg / 0.8 lb	<b>Ports</b>	Gigabit Ethernet In Gigabit Ethernet Out HDMI Out 3.5mm RS232 w/null modem
<b>Encryption</b>	Hardware-Based AES 256-bit Encryption of network video signal	<b>Power Supply (not included)</b>	~4.7-23V 5.5mm/2.1mm, Positive tip
<b>Operating Temp</b>	0-60 °C / 32-140 °F	<b>Supported Resolutions</b>	Up to 4096x2160 (interlaced & progressive)